
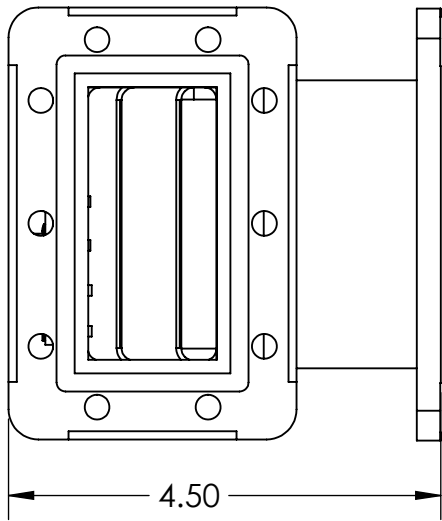
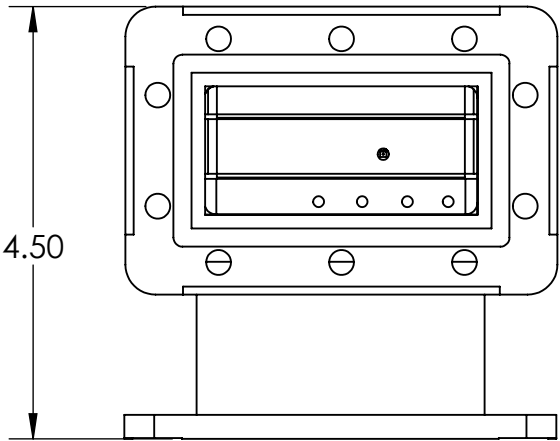
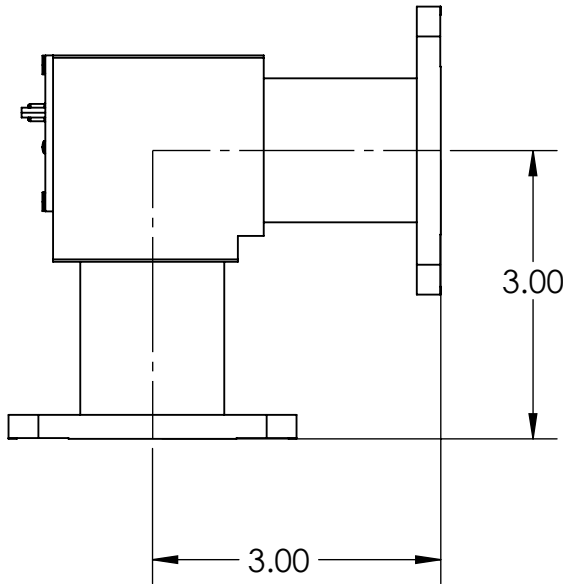


WARNING, THIS DRAWING AND ITS CONTENTS ARE PROPERTY OF  
UNIQUE BROADBAND SYSTEMS LTD., AND SHALL NOT BE CIRCULATED  
OR REPRODUCED WITHOUT THE WRITTEN PERMISSION OF UNIQUE  
BROADBAND SYSTEMS LTD.

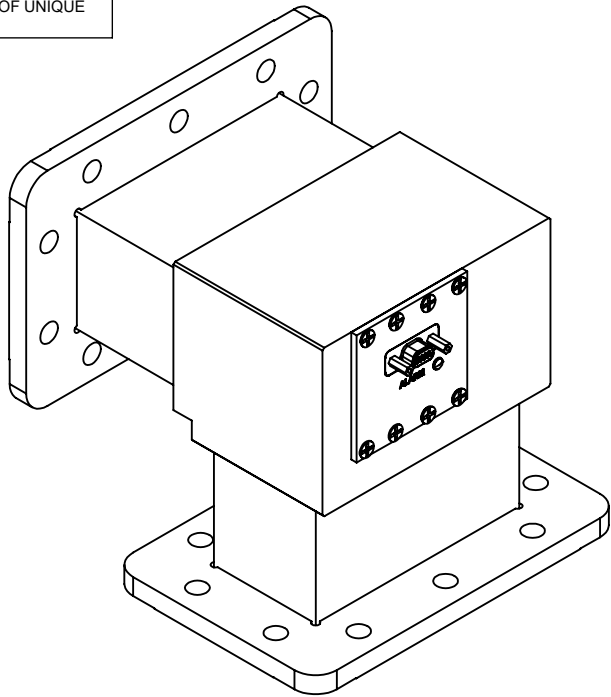

Electrical Specification

Spectral Responce: 320nm – 1050nm (visible light and near-infrared spectrum, peak at Ired=640-750nm)  
DC supply voltage: Typical +12V (Min=7V /Max=18V)  
Supply current: 35 mA

Output Voltage: TTL Fault/Fired Alarm (Vo)= TTL High  
Open-drain Fault/Fired Alarm (Vo) = 0.1,0.35Volts (Imax=400mA,Vmax=60V)

Response Time: less than 10 µsec.  
Pressure Sealed to: 30 PSI

Operating Temperature Range: - 40 ~ + 85°C

Arc Detector’s connector pinout (Micro-D Plug , Male, 9 Pins):

- 9 – DC supply Voltage:

+12VDC at 35 mA.
- 1, 5, 6, 7, 8 –

Ground
- 2 - Output Voltage:

Option 1 -- The “Alarm” signal is TTL High  
Option 2 -- Open-Drain”
- 3 - Latching Reset Capability:

After being triggered by an arc, the output will remain  
in state “Alarm” until the Arc Detector is manually reset.  
This is accomplished by bringing TTL Low to this pin momentarily,  
then returned to TTL High.
- 4 - Self test:

To test the optical detector and triggering/latching ability,  
the low voltage is to be applied to this pin

PROJECT	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.TOLERANCES ARE: DECIMALS ANGLES .X ± .02 .XX ± .010 ± 0.5° .XXX ± .003 MACHINED SURFACES: 32/√		CAD GENERATED DRAWING DO NOT MANUALLY UPDATE OR SCALE		230 Bayview Drive Unit 16 Barrie, Ontario, L4N 4Y8, Canada Tel: (905) 669-8533 Fax (905) 669-8516		
	MATERIAL		APPROVALS	DATE	WR284 ARC DETECTOR		
	FINISH		DRAWN BY				
NEXT ASSEMBLY			CHECKED BY		SIZE B DWG. # PART # DOC. TYPE REV.		
			APPROVED BY				
			SCALE 3:2		SHEET 1 OF 1		