


WR90 to N-type Adapter

Typical Application

- SATCOM
- Broadcast
- Radars

Product Features

- 8.20 to 12.5 GHz Frequency Range
- Low Insertion Loss and VSWR
- WR-90 Waveguide with CPR Flange
- N-type Connector
- Compact form-factor
- Easily integrated into existing systems

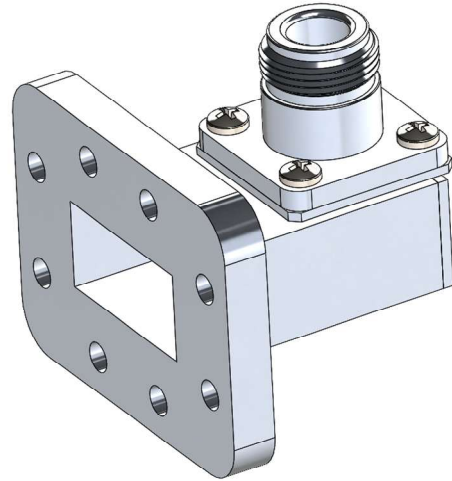

Product Description

UBS offers a standard product line of precision rectangular waveguide-to-coax adapters covering waveguide sizes from WR-22 through WR-650.

Our manufacturing process ensures all physical components and product performance are of the highest quality, in order to meet the most rigorous industry standards and clients' demands.

Electrical	
Operating Frequency	8.20 - 12.5 GHz
VSWR	1.2:1 typ.
Impedance	50 Ohms
Power Handling	60W
Operating Temperature Range	-40°C to +85°C

Mechanical	
Body Style	Right Angle
Waveguide	WR-90 with CPR Flange
Connector	N-type Female
Material	Aluminum
Finish	Paint
Dimensions (W x H x L)	1.89" x 2.05" x 1.75"
Weight	54.4 g

(specifications are subject to change without notice)