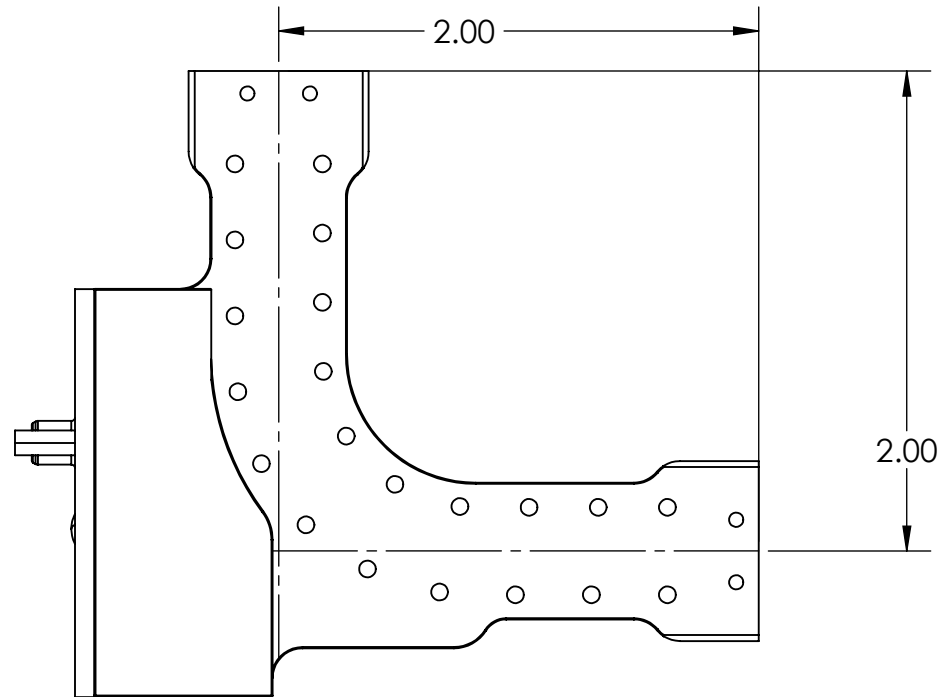
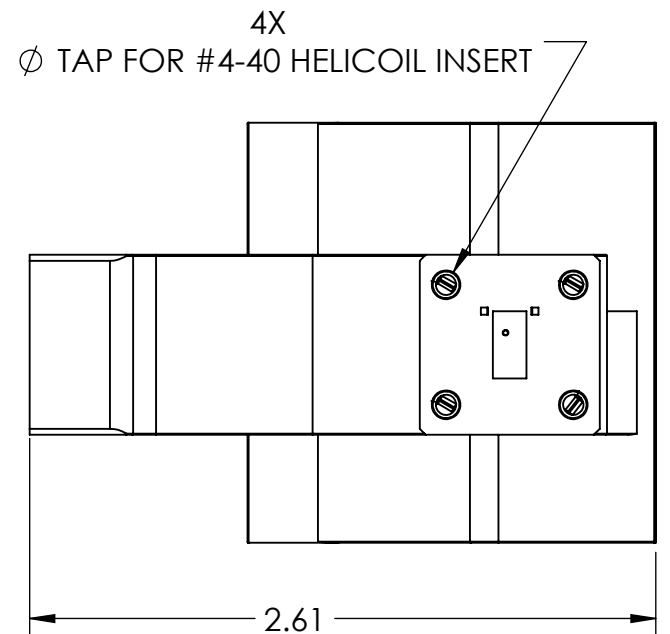
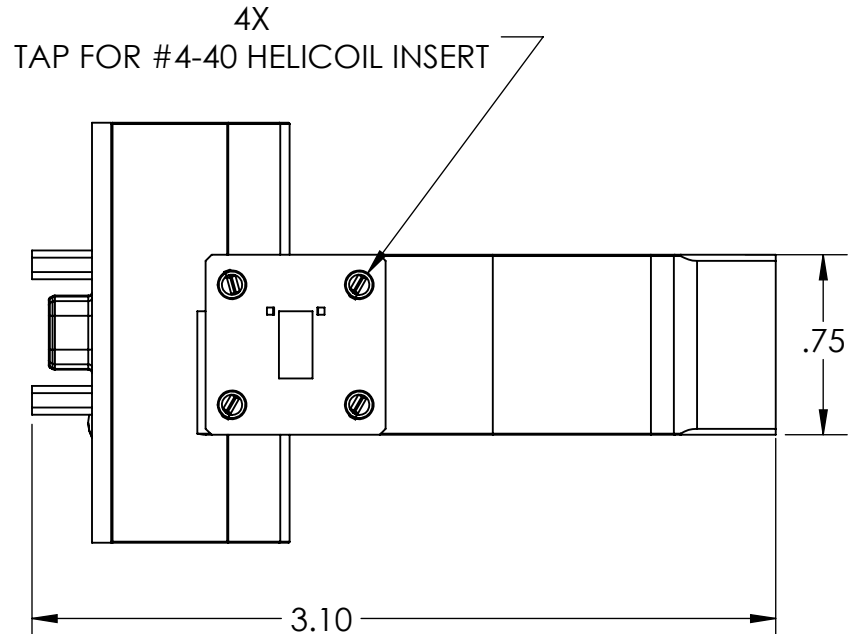
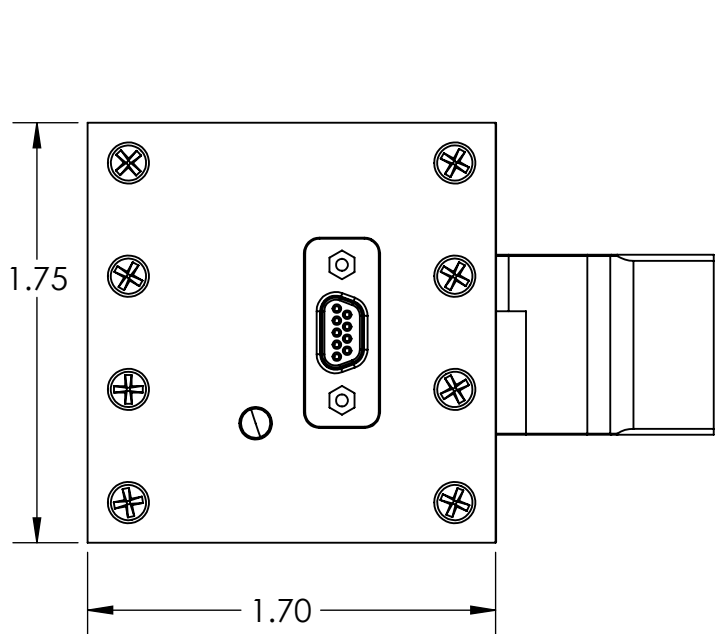
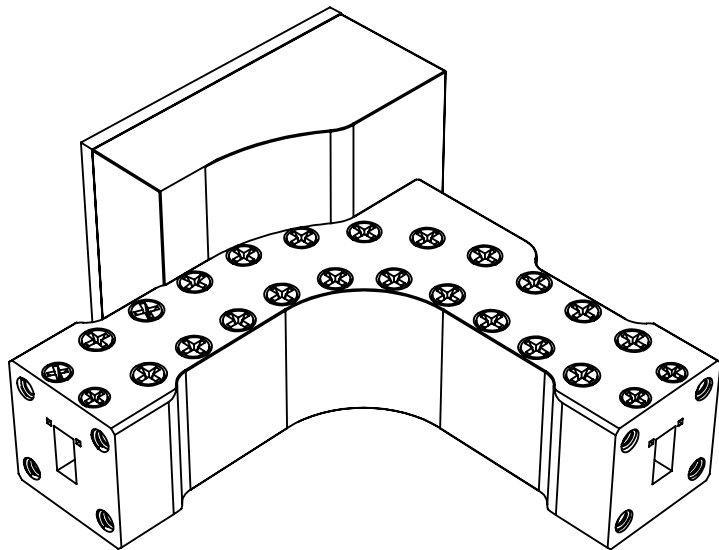


WARNING, THIS DRAWING AND ITS CONTENTS ARE PROPERTY OF  
UNIQUE BROADBAND SYSTEMS LTD., AND SHALL NOT BE CIRCULATED  
OR REPRODUCED WITHOUT THE WRITTEN PERMISSION OF UNIQUE  
BROADBAND SYSTEMS LTD.



Electrical Specification

Spectral Responce: 320nm – 1050nm (visible light and near-infrared spectrum, peak at Ired=640-750nm)  
DC supply voltage: Typical +12V (Min=7V /Max=18V)  
Supply current: 35 mA

Output Voltage: TTL Fault/Fired Alarm (Vo)= TTL 1 (5 volts)  
Open-drain Fault/Fired Alarm (Vo) = 0.1,0.35Volts (Imax=400mA,Vmax=60V)



Response Time: less than 10 µsec.  
Pressure Sealed to: 30 PSI

Operating Temperature Range: - 40 ~ + 85°C

Arc Detector's connector pinout (Micro-D Plug , Male, 9 Pins):

- 9 – DC supply Voltage: +12VDC at 35 mA.  
1, 5, 6, 7, 8 – Ground  
2 - Output Voltage: Option 1 -- The “Alarm” signal is TTL 1 (+5V)  
Option 2 -- Open-Drain”  
3 - Latching Reset Capability: After being triggered by an arc, the output will remain in state “Alarm” until the Arc Detector is manually reset. This is accomplished by bringing TTL 0 (0 V) to this pin momentarily, then returned to TTL 1 (+5VDC).
- 4 - Self test: To test the optical detector and triggering/latching ability, the low voltage 0V at 20mA is to be applied to this pi

Note: outline drawing, not for manufacturing

PROJECT		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.TOLERANCES ARE: DECIMALS      ANGLES X   ± .02 XX   ± .010      ± 0.5° .XXX ± .003 MACHINED SURFACES: 32/√		 CAD GENERATED DRAWING DO NOT MANUALLY UPDATE OR SCALE		230 Bayview Drive Unit 16 Barrie, Ontario, L4N 4Y8, Canada Tel: (905) 669-8533 Fax (905) 669-8516				
NEXT ASSEMBLY		MATERIAL	DRAWN BY		WR 28 ARC DETECTOR					
		T6 - 6061 ALUMINUM	CHECKED BY							
		FINISH	APPROVED BY							
		CLEAR IRIDITE			SIZE B		DWG. #		REV. 01	
					SCALE 3:2		PART #		DOC. TYPE	
									SHEET 1 OF 1	