
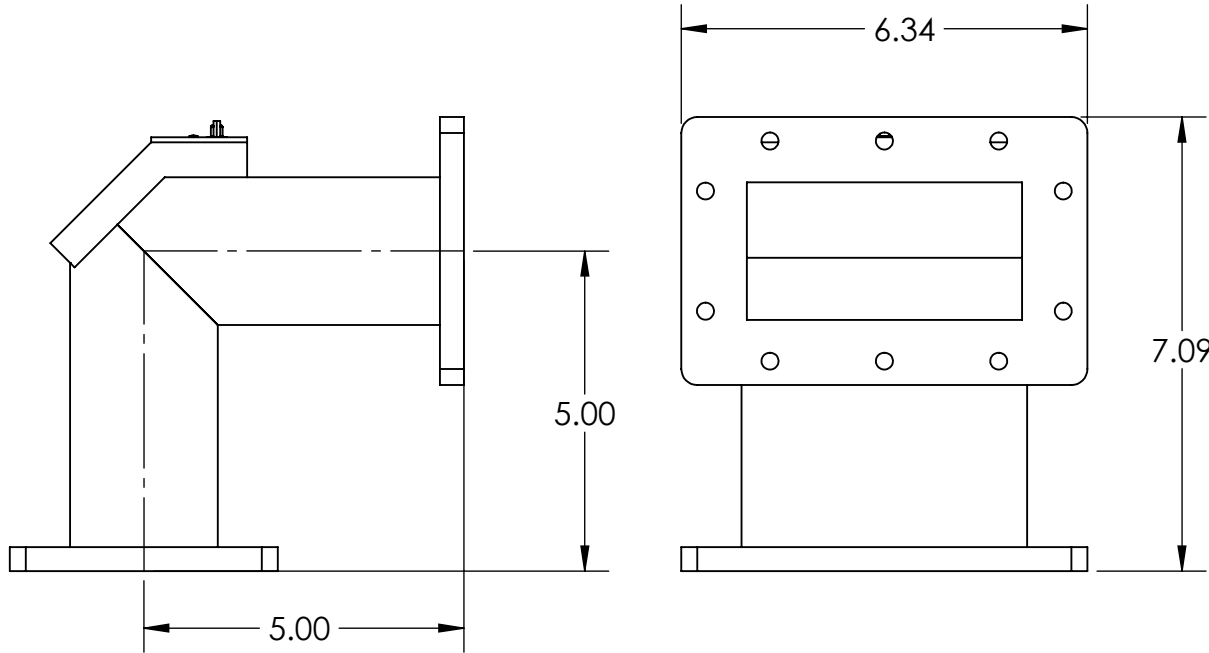


WARNING, THIS DRAWING AND ITS CONTENTS ARE PROPERTY OF
UNIQUE BROADBAND SYSTEMS LTD., AND SHALL NOT BE CIRCULATED
OR REPRODUCED WITHOUT THE WRITTEN PERMISSION OF UNIQUE
BROADBAND SYSTEMS LTD.

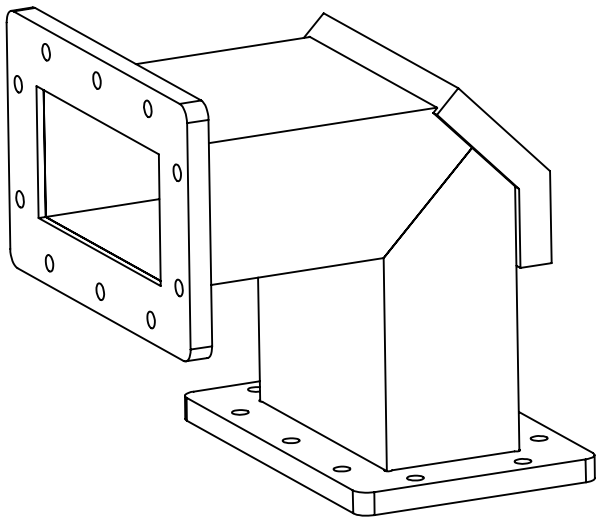

Electrical Specification

Spectral Responce: 320nm – 1050nm (visible light and near-infrared spectrum, peak at Ired=640-750nm)
DC supply voltage: Typical +12V (Min=7V /Max=18V)
Supply current: 35 mA


Output Voltage: TTL Fault/Fired Alarm (Vo)= TTL High
Open-drain Fault/Fired Alarm (Vo) = 0.1,0.35Volts (Imax=400mA,Vmax=60V)

Response Time: less than 10 μsec.
Pressure Sealed to: 30 PSI

Operating Temperature Range: - 40 ~ + 85°C

Arc Detector’s connector pinout (Micro-D Plug , Male, 9 Pins):

- 9 – DC supply Voltage: +12VDC at 35 mA.
1, 5, 6, 7, 8 – Ground
- 2 - Output Voltage: Option 1 -- The “Alarm” signal is TTL High
Option 2 -- Open-Drain”
- 3 - Latching Reset Capability: After being triggered by an arc, the output will remain
in state “Alarm” until the Arc Detector is manually reset.
This is accomplished by bringing TTL Low to this pin momentarily,
then returned to TTL High.
- 4 - Self test: To test the optical detector and triggering/latching ability,
the low voltage is to be applied to this pin

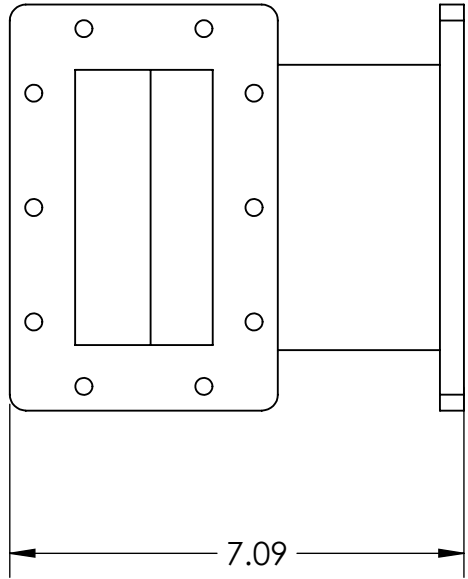

PROJECT	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.TOLERANCES ARE: DECIMALS ANGLES X ± .02 XX ± .010 ± 0.5° .XXX ± .003 MACHINED SURFACES: 32/√	 CAD GENERATED DRAWING DO NOT MANUALLY UPDATE OR SCALE		230 Bayview Drive Unit 16 Barrie, Ontario, L4N 4Y8, Canada Tel: (905) 669-8533 Fax (905) 669-8516				
		APPROVALS	DATE	WR430 ARC DETECTOR				
NEXT ASSEMBLY	MATERIAL	DRAWN BY						
	ALUMINUM / BRASS	CHECKED BY						
	FINISH	APPROVED BY		SIZE	DWG. #	PART #	DOC. TYPE	REV.
	PAINT / IRIDITE			B				
				SCALE	3:2			