


Triple Arm Coaxial Coupler

Product Features

- High power handling capability
- Rugged mechanical design

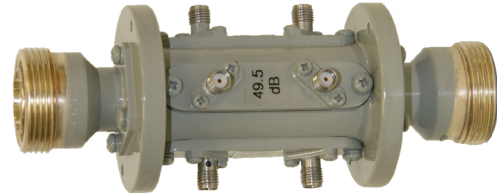

Product Specifications

Operating Frequency	2.0 GHz - 3.0 GHz
Continuous Power Handling Capacity	400 Watts
VSWR Main Line Output	1.15:1
VSWR Coupled Ports	1.2:1
Directivity	25 dB min.
Coupling ports Accuracy	± 0.5 dB max
Input/Output ports	7/16 DIN-type (F) (other options available)
Coupled Ports	SMA (F)
Dimensions (L x W x H)	5.35" x 2.10" x 1.80"

(specifications are subject to change without notice)