
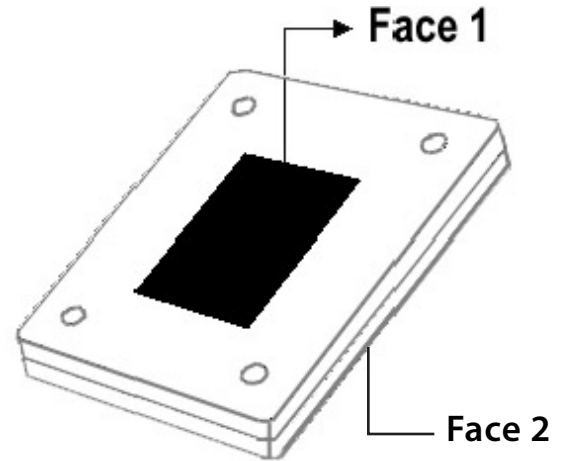


Part Description

UBS offers a line of pressure windows to mate with all standard waveguide flanges. In addition to the popular standard flanges listed, UBS offers a more complete line of industry standard flange styles upon request. All pressure windows are manufactured from 0.0625" material and are designed to be used up to a maximum pressure of 10 psi (3-5 psi typical). These pressure windows are for low power Tx/ Rx application (below 250 Watts average power) and do not have pressure inlets or gasket grooves. Holes for attachment hardware are drilled clear.

Ordering Data

Part number - 115 - X - X - X



Flange Configuration

Flange Type	C - Cover G - Groove CHOKE CMR CPR (F, G)
--------------------	---

Electrical Specification

VSWR	< 1.1 max.
-------------	------------

Specifications

Size	C	G	CHOKE	CMR	CPR
WR28	•	•	•		
WR34	•	•	•		
WR42	•	•	•		
WR51	•	•	•		
WR62	•	•	•		
WR75	•	•	•	•	•
WR90	•	•	•	•	•
WR112	•	•	•	•	•
WR137	•	•	•	•	•
WR159	•	•	•	•	•
WR187	•	•	•	•	•
WR229	•	•	•	•	•
WR284	•	•	•	•	•
WR340	•	•	•	•	•
WR430	•	•	•	•	•
WR650	•	•	•	•	•

(specifications are subject to change without notice)